

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
6 June 2002 (06.06.2002)

PCT

(10) International Publication Number
WO 02/45401 A1

(51) International Patent Classification⁷: **H04M 15/00**,
H04Q 7/38, 7/22

(21) International Application Number: PCT/EP00/11887

(22) International Filing Date:
28 November 2000 (28.11.2000)

(25) Filing Language: English

(26) Publication Language: English

(71) Applicant (for all designated States except US): **NOKIA NETWORKS OY** [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **YLI-PIETILÄ, Marko** [FI/HU]; Agnes utca 29 A6, H-1121 Budapest (HU). **HARTIKAINEN, Auvo** [FI/HU]; Endrodi Sandor u. 48, H-1026 Budapest (HU).

(74) Agent: **LESON, Thomas, Johannes, Al**; Tiedtke-Bühling-Kinne et al., Bavariaring 4, 80336 München (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: MESSAGE CHARGING COUNTERS FOR SUBSCRIBER GROUPS

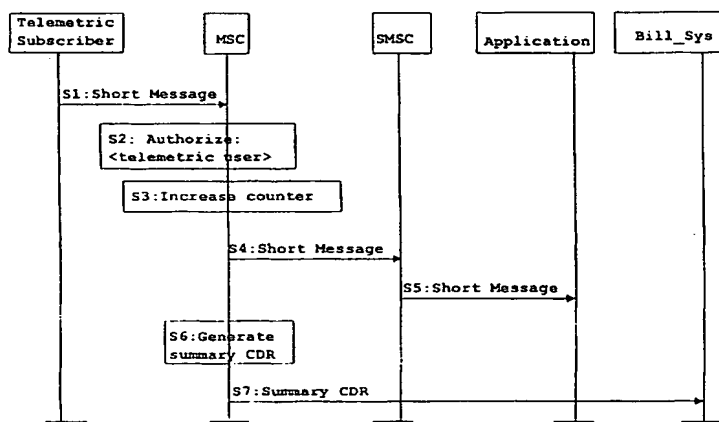

(57) Abstract: The present invention proposes a method for generating charging data for at least one specific user group (A, B) comprising at least one user terminal (A1, A2, A3), said at least one specific user group having subscribed to a communication network (MSC, SMSC, BILL SYS) said communication network comprising at least one exchange entity (MSC, SMSC) adapted to forward messages transmitted from a respective user terminal (A1, A2, A3) of said at least one specific user group (A) to a respective predetermined destination (D A) associated to a respective one of said at least one specific user group (A), wherein at said exchange entity (MSC, SMSC) there is allocated a respective counter means (C A, C B, C C) to each of said predetermined destinations (D A, D B, D C), said method comprising the steps of: detecting (S2) the arrival of a message at said exchange entity (MSC, SMSC), verifying (S2) that the origin of said message is a user terminal (A1, A2, A3) belonging to one (A) of said at least one specific user groups (A, B), identifying (S2) said at least one specific user group (A) and said associated predetermined destination (D A), and incrementing (S3) said counter means (C A, C B, C C) allocated to said predetermined destination (D A, D B, D C) associated to said identified specific user group (A, B). Also, the present invention proposes an accordingly adapted exchange entity of a communication network.

WO 02/45401 A1

TITLE OF THE INVENTION

MESSAGE CHARGING COUNTERS FOR SUBSCRIBER GROUPS

5 FIELD OF THE INVENTION

The present invention relates to a method for generating charging data for at least one specific user group comprising at least one user terminal, said at least one
10 specific user group having subscribed to a communication network, said communication network comprising at least one exchange entity. Also, the present invention relates to a correspondingly adapted exchange entity of said communication network.

15

BACKGROUND OF THE INVENTION

In communication networks, such as for example a GSM network, a plurality of subscribers have subscribed
20 thereto. Among the plurality of subscribers, several subscriber groups comprising subscribers with an identical or at least rather similar subscriber profile can be defined. A subscriber profile in this connection means the behavior of an individual subscriber belonging to said
25 group, with the subscribers belonging to a subscriber group behaving in an identical or rather similar way.

The present application and the invention as described below is applicable to all specific subscriber groups which
30 can be recognized, irrespective of the parameter used for recognizing the subscriber group.

For example, a subscriber group may be represented by the salesmen of a company traveling/roaming within the network
35 and regularly calling their company headquarter. Still

- 2 -

further, a subscriber group may be represented by
telemetric subscribers / telemetric users.

Only for explanatory purposes, the telemetric subscribers
5 are chosen hereinafter. Nevertheless, the present invention
is not limited to those telemetric subscribers. In this
connection, a telemetric subscriber is intended to mean a
user terminal such as a mobile station MS or just a
wireless (non-mobile) terminal which is related to an
10 appliance such as a gas meter or electricity meter or a
water meter. The terminal sends information from the
appliance in the form of messages. The messages carry
information related to the appliance such as the amount of
gas/water/electricity consumed at the appliance. Typically,
15 such a message is a SMS message (Short Message Service) or
an USSD message (Unstructured Supplementary Service Data).
Also, there are normally a huge number of such telemetric
users since each apartment or house has such an
appliance(s) to which a telemetric subscriber can be / is
20 associated. Thus, a telemetric user means: no speech calls,
but only SMS and/or USSD traffic and/or data calls; low
traffic profile, e.g. controllable traffic scheduling (out
of busy hours); no need for continuous mobility management
(MM) handling; and limited service profiles, limited
25 service area.

A typical example can be a mobile station / wireless
terminal MS installed next to a gas- or electric- meter,
positioned on a fixed place, at a house (no MM), reporting
30 once a month (low traffic) by SMS (no calls) at night
(traffic scheduling).

The messages transmitted by said telemetric user terminals
are directed to a central database which is a predetermined
35 destination for a telemetric user. Namely, a telemetric

- 3 -

user reporting the electricity consumption at an appliance will of course report this to a database of the electricity provider / electricity company.

- 5 Because of the huge amount of telemetric users (there are hundreds of thousands of gas and electricity meters in any big city in the world) charging in GSM system might become very loaded as a CDR (call detail record) is generated when telemetric users send their data. If the number of
- 10 telemetric users increases significantly in the near future message (SMS) charging will become one of the capacity bottlenecks.

Previously, different kinds of options for barring CDR generation and to selectively generate them. The following options are for example available:

1. The type of SMS for which CDRs are generated (normal, status report and/or command SMS) can be chosen; however, this results in the fact that messages of some
- 20 types could be sent for free which is not desirable from a viewpoint of a network operator who provides transmission capacities in the network;
2. It can be chosen whether the CDRs are generated for all messages or only for successfully transmitted ones;
- 25 however, also messages (SMS) which are not successfully delivered consume transmission capacity until they are found to be undeliverable/not successfully delivered, and any usage of transmission capacity is desirable from a viewpoint of a network operator who provides transmission
- 30 capacities in the network to be charged for;
3. It can be chosen where and how CDRs are generated (i.e. whether at a Visited Mobile Switching Center VMSC, at Interworking Mobile Switching Center IWMSC, at a Gateway Mobile Switching Center GMSC (also referred to as Transit
- 35 Mobile Switching Center); however, although this

- 4 -

distributes the CDRs generated within the network, the overall number thereof remains uninfluenced thereby;

4. It can be chosen whether CDRs are generated for Mobile Originated MO, Mobile Terminated MT and/or Mobile Forwarded MF messages; however, any usage of transmission capacity is desirable from a viewpoint of a network operator who provides transmission capacities in the network to be charged for, whereas according to such an approach, some messages could be transmitted for free, as mentioned above;

Thus, none of the previous proposals provides for a satisfactory charging of messages transmitted by a specific user group while avoiding congestion situations in the network and while saving network resources.

SUMMARY OF THE INVENTION

Consequently, it is an object of the present invention to provide a method for generating charging data for at least one specific user group comprising at least one user terminal, said at least one specific user group having subscribed to a communication network said communication network comprising at least one exchange entity, which method is free from above mentioned drawbacks.

Still further, it is an object of the present invention to provide an accordingly adapted network exchange entity.

According to the present invention, the above first object is achieved by a method for generating charging data for at least one specific user group comprising at least one user terminal, said at least one specific user group having subscribed to a communication network said communication network comprising at least one exchange entity adapted to forward messages transmitted from a respective user

- 5 -

terminal of said at least one specific user group to a
respective predetermined destination associated to a
respective one of said at least one specific user group,
wherein at said exchange entity there is allocated a
5 respective counter means to each of said predetermined
destinations, said method comprising the steps of:
detecting the arrival of a message at said exchange entity,
verifying that the origin of said message is a user
terminal belonging to one of said at least one specific
10 user groups, identifying said at least one specific user
group and said associated predetermined destination, and
incrementing said counter means allocated to said
predetermined destination associated to said identified
specific user group.

15

According to further developments of the present invention
- the method comprises a further step of generating
charging data (CDR) based on a count value of said counter
means;

20

- the method comprises a further step of resetting said
respective counter means after generation of charging data;
- said charging data (CDR) is regularly generated after a
predetermined period of time;

- said charging data (CDR) is regularly generated when the
25 counter means reaches a predetermined count value;

- the method comprises a further step of delivering said
message to said associated predetermined destination;
- the method comprises a step of transmitting the generated
charging data (CDR) to a billing entity of said

30 communication network, and establishing a bill on the basis
of said charging data for said respective specific user
group;

- said specific user group is a telemetric user group;

- said message is a short message SMS;

35 - said message is a USSD message;

- 6 -

According to the present invention, the above second object is achieved by an exchange entity of a communication network adapted to forward messages transmitted from a
5 respective user terminal of at least one specific user group to a respective predetermined destination associated to a respective one of said at least one specific user group, said exchange entity comprising: a respective counter means associated to each of said predetermined
10 destinations, detecting means adapted to detect the arrival of a message at said exchange entity, verifying means adapted to verify that the origin of said message is a user terminal belonging to one of said at least one specific user groups, identifying means adapted to identify said at
15 least one specific user group and said associated predetermined destination, and control means adapted to increment said counter means allocated to said predetermined destination associated to said identified specific user group in response to signals applied thereto
20 from said detecting, verifying and identifying means.

According to further developments of the present invention

- said entity further comprises generation means adapted to generate charging data (CDR) based on a count value of said
25 counter means;
- said control means is adapted to reset said respective counter means after generation of charging data;
- said control means is adapted to regularly generate said charging data (CDR) after a predetermined period of time.
- 30 - said control means is adapted to regularly generate said charging data (CDR) when the counter means reaches a predetermined count value;
- said entity further comprises an output means adapted to deliver said message to said associated predetermined
35 destination;

- 7 -

- said entity further comprises a transmitter adapted to transmit the generated charging data (CDR) to a billing entity (BILL_SYS) of said communication network adapted to establish a bill on the basis of said charging data for
5 said respective specific user group.

Accordingly, by virtue of the present invention, the following advantages can be obtained:

- charging of user of a user group such as telemetric users
10 can be simplified,
- generation of hundreds of thousands or millions of CDRs per month can be prevented
- charging capacity in an exchange entity such as an MSC as well as in a billing system can be saved,
15 - congestion in the communication system in connection with transmitting of CDRs can be avoided,
- network resources can be saved and/or saved resources can be used for other purposes than CDR transmission,
- a more efficient usage of the communication network
20 resources is thus enabled by provisioning these advanced telemetric and message services for the communication network's customers, while the companies owning the telemetric user system may lower their operating costs as there is no more need for personnel to collect the data,
25 which by the way are more accurate and obtained more quickly when using a telemetric system.

BRIEF DESCRIPTION OF THE DRAWINGS

- 30 The above and other objects, features and advantages of the present invention will become more fully apparent when read in conjunction with the accompanying drawings, in which

- 8 -

Fig. 1 illustrates a signaling scenario and method steps executed in connection with the method according to the present invention, and

- 5 Fig. 2 illustrates a block diagram of those components of an exchange entity of a communication network which are relevant in connection with the present invention.

DETAILED DESCRIPTION OF THE EMBODIMENTS

10

The present invention will now be described in detail with reference to the drawings.

- 15 Fig. 1 illustrates a signaling scenario and method steps executed in connection with the method according to the present invention.

A telemetric subscriber, i.e. a terminal thereof such as a mobile station, is assumed to represent a subscriber
20 belonging to a specified user group. Although in Fig. 1 only one telemetric subscriber is shown, a plurality of those telemetric subscribers of one or more subscriber groups may be present. In order to keep the description simple, however, only one telemetric subscriber is
25 considered for explanatory purposes. Nevertheless, the present invention may also cope with the case of plural subscribers of plural subscriber groups.

- 30 The subscriber group or groups have subscribed to a communication network. For explanatory purposes, the communication network is assumed to be a GSM network (Global Standard of Mobile communication) and the labeling of the network entities referred to is given with regard to the GSM network as an example. Nevertheless, it is to be
35 noted that the present invention is also applicable and to

- 9 -

be implemented to another communication network such as the UMTS (Universal Mobile Telecommunications System) network etc.

- 5 Also, only those network parts involved in the present invention are shown and explained. Thus, the access network such as a radio access network RAN of GSM and/or UTRAN (Universal Terrestrial Radio Access Network) of UMTS are neither shown nor explained.

10

Now, referring back to Fig. 1, in step S1 a telemetric subscriber terminal sends a message to the communication network. More particularly, the terminal sends a Short Message also known as SMS via the (radio) access network

15

(not shown) to the exchange entity of the network.

According to GSM standards, the exchange entity is a Mobile Switching Center MSC. Still further, in case the sent message is an SMS, the exchange entity can be regarded as a cooperation of an MSC and an SMSC (Short Message Service

20

Center).

The message consists of a message header carrying sender identification information as well as destination identification information such as respective addresses or telephone numbers, and a message body carrying the content /use data of the message. In case of a telemetric user terminal installed at a gas meter, the message content includes the amount of consumed gas. These data are to be forwarded to an "application" (also referred to as

25

30 "destination" in Fig. 2), i.e. the company who provides the gas and bills the consumer for the amount of gas delivered. To be distinguished from this billing for gas consumption is the billing of the company by the operator of the network for the usage of communication network resources

- 10 -

for forwarding the messages to the "application", i.e. the gas providing company.

In step S2, the exchange entity MSC detects the arrival of
5 said message (SMS or USSD, for example) at the exchange entity. Also, the MSC performs a verification that the origin of said message is a user terminal belonging to one of said at least one specific user groups, as well as an identification of said at least one specific user group and
10 said associated predetermined destination.

If the verification and identification was successful, the exchange entity MSC increments, step S3, a counter means allocated to said predetermined destination associated to
15 said identified specific user group to which said subscriber belongs.

The message is then, in step S4, forwarded to an SMSC co-operating with said MSC for further delivering the message
20 in a subsequent step S5 to the application, i.e. the intended destination of the message. At the application side, the message contents (contained in the message body) is processed further (not shown).

25 At the exchange entity side, in step S6, charging data (CDR) based on a count value of said counter means are generated. Of course, it is to be understood that there is a resetting of said respective counter means after generation of charging data, and also a resetting upon
30 counter initialization (not shown) in the beginning of a charging cycle. With regard to a charging cycle, said charging data (CDR) can be regularly generated after a predetermined period of time. Nevertheless, it is also possible that said charging data (CDR) is regularly
35 generated when the counter means reaches a predetermined

- 11 -

count value (in this case, a cycle would not depend on a lapsed period time but on a predefined billing amount).

The generated charging data (CDR) are in step S7
5 transmitted to a billing entity BILL_SYS of said communication network, which billing entity establishes a bill on the basis of said charging data for said respective specific user group. The established bill then charges the owner of the telemetric user group for the usage of the
10 communication network, with the billing being based on the number of transmitted messages.

Thus, as explained above, in order to avoid congestion situations and to save communication network resources, a
15 special counter system is introduced. The system is located in an exchange entity such as the MSC. Counters of the system record the number of mobile originated short messages (MO-SM) from different telemetric users owned by organizations, for example during one months, and generate
20 only one CDR per organization (several if one organization owns many telemetric user systems like gas and electricity). By doing so the system would be prevented from generating hundreds of thousands or even millions of CDRs per month. This would save capacity in both the MSC
25 (mobile switching center) and Billing System. In detail, a telemetric users send an SMS message to an application (destination) which records the data in the message to a database. The message arrives in an MSC where the called number (B-number) of the destination is analyzed. Analysis
30 includes user category recognition. If the category is "telemetric user" then the counter assigned to the destination / B-number will be increased and or incremented. If the category is not "telemetric user" (fraud situation) the mobile originated short message MO-SM
35 will not be delivered and the counter will be left

- 12 -

untouched. The SMS continues from the MSC to the application through an SMSC (SMS Center). After a certain time has passed (for example 1 month) a summary CDR is generated per counter in MSC and sent to the billing system
5 attached to the MSC. Thereby, the network operator will charge the organization owning the telemetric equipment by transactions made during the set period, with the price being defined by a transaction.

10 Fig. 2 illustrates a block diagram of those components of an exchange entity of a communication network which are relevant in connection with the present invention.

As shown in Fig. 2, different specified user groups A, B, C
15 are present. Each user group comprises a plurality of individual users /user terminals, such as A1, A2, A3 in connection with user group A. A message such as a SMS from a respective user to a predetermined destination for the user group to which said user belongs to is sent via the
20 communication network to a destination D_A (for user group A) or D_B, D_C in case of user groups B, C, respectively.

As shown in Fig. 2, the exchange entity is for example an MSC of the network. This exchange entity comprises a
25 detection means, a verification/identification means, and an output means. The message from a subscriber (e.g. A1) is received at said exchange entity MSC. The message is decomposed into message header and message body. For example, based on the message header, it is detected that a
30 message SMS has been received. Then, the detection result controls the identification/verification means to verify/identify the origin and destination of the message based on the information included in the header.

- 13 -

The operation of these means is as described above in connection with the authentication in step S2 of Fig. 1. Namely, if the message originating user belongs to a specified subscriber group, the verification/identification means controls the output means to deliver the message to the destination defined by data contained in the message header (e.g. to destination for subscriber group A, i.e. D_A), as described in connection with steps S1, S4, S5 in Fig. 1.

10

Furthermore, the exchange entity comprises a control and timer means, a counter means comprising a counter C_A, C_B, C_C for each user group A, B, C, respectively, a CDR generation means for generating charging data, and a transmitter means for transmitting generated charging data to a billing system entity BILL_SYS of the communication network.

15

If the verification/identification was successful in that the message originating subscriber terminal (e.g. A1) belongs to a specified user group, the control and timer means is triggered accordingly. The control and timer means then outputs a count signal and increments the counter (e.g. C_A) associated to the user group to which the message originating subscriber terminal belongs. Thus, upon reception of each respective message from a user of a specified user group the corresponding counter of said counter means is incremented.

20

Still further, the control and timer means controls the CDR generation means in order to generate charging data based on the counter value(s) and to output these data to said transmitter means for transmission to the billing system entity of the communication network BILL_SYS. (Note that

25

30

- 14 -

control signals applied from the control means to the transmitter means are omitted in the drawing).

5 The operation of these means is as described above in connection with steps S3, S6, S7 of Fig. 1.

Although herein above the present invention has been described such that the method steps and corresponding means are implemented at the MSC as an exchange entity, it
10 is to be understood that the method steps and means could also be implemented at the SMSC as an exchange entity of the network.

Still further, the present invention has been described
15 such that based on the count value(s) of the counter(s) charging data (CDRs) are generated and that the CDRs are transmitted to the billing system entity. Nevertheless, it is of course possible to transmit the counter value(s) as such and to provide for the generation of the CDRs at the
20 billing system side.

Moreover, from a security aspect, it is of course to be understood that the counter value(s) are backed-up at the MSC and/or SMSC or somewhere else in the network,
25 preferably in a non-volatile memory, as the counter values may represent a significant amount of money to be charged by the network operator running the communication network.

Also, in order to identify users belonging to a specific
30 user group, a corresponding information has to be provided in a database, e.g. in the Home Location Register HLR of the network. Alternatively, such a database may be provided directly in the exchange. Or, a copy of a database in the HLR may be downloaded to an exchange entity.

35

- 15 -

It has to be noted that although the above description has mainly be given with regard to mobile originated messages (MO-SM), the present invention is easily applicable to mobile terminated messages. For example, assuming a case in which an application (Fig. 2) addresses individual users by a message sent to them. I such a case, the sent message (header thereof) could be analyzed and the number of destination addresses corresponding to a number of addressed user terminals could be counted. Thus, each time such a message is sent, the counter for the user group is not incremented by one but augmented by the number of addressed user terminals.

Accordingly, as has been described in the foregoing, the present invention proposes a method for generating charging data for at least one specific user group (A, B) comprising at least one user terminal (A1, A2, A3), said at least one specific user group having subscribed to a communication network (MSC, SMSC, BILL_SYS) said communication network comprising at least one exchange entity (MSC, SMSC) adapted to forward messages transmitted from a respective user terminal (A1, A2, A3) of said at least one specific user group (A) to a respective predetermined destination (D_A) associated to a respective one of said at least one specific user group (A), wherein at said exchange entity (MSC, SMSC) there is allocated a respective counter means (C_A, C_B, C_C) to each of said predetermined destinations (D_A, D_B, D_C), said method comprising the steps of: detecting (S2) the arrival of a message at said exchange entity (MSC, SMSC), verifying (S2) that the origin of said message is a user terminal (A1, A2, A3) belonging to one (A) of said at least one specific user groups (A, B), identifying (S2) said at least one specific user group (A) and said associated predetermined destination (D_A), and incrementing (S3) said counter means (C_A, C_B, C_C)

- 16 -

allocated to said predetermined destination (D_A, D_B, D_C) associated to said identified specific user group(A, B). Also, the present invention proposes an accordingly adapted exchange entity of a communication network.

5

Although the present invention has been described herein above with reference to its preferred embodiments, it should be understood that numerous modifications may be made thereto without departing from the spirit and scope of the invention. It is intended that all such modifications
10 fall within the scope of the appended claims.

- 17 -

CLAIMS

1. A method for generating charging data
for at least one specific user group (a, B) comprising
5 at least one user terminal (A1, A2, A3),
said at least one specific user group having
subscribed to a communication network (MSC, SMSC,
BILL_SYS)
said communication network comprising
10 at least one exchange entity (MSC,
SMSC)
adapted to forward messages
transmitted from a respective user
terminal (A1, A2, A3) of said at least
15 one specific user group (A) to a
respective predetermined destination
(D_A) associated to a respective one of
said at least one specific user group
(A), wherein
20 at said exchange entity (MSC,
SMSC) there is allocated a respective
counter means (C_A, C_B, C_C) to each
of said predetermined destinations
(D_A, D_B, D_C),
25 said method comprising the steps of:
- detecting (S2) the arrival of a message at said
exchange entity (MSC, SMSC),
- verifying (S2) that the origin of said message is a
user terminal (A1, A2, A3) belonging to one (A) of said at
30 least one specific user groups (A, B),
- identifying (S2) said at least one specific user
group (A) and said associated predetermined destination
(D_A), and

- 18 -

- incrementing (S3) said counter means (C_A, C_B, C_C) allocated to said predetermined destination (D_A, D_B, D_C) associated to said identified specific user group(A, B).

5 2. A method according to claim 1, further comprising a step of

- generating (S6) charging data (CDR) based on a count value of said counter means.

10 3. A method according to claim 2, further comprising a step of

- resetting said respective counter means after generation of charging data.

15 4. A method according to claim 2, wherein
said charging data (CDR) is regularly generated after a predetermined period of time.

20 5. A method according to claim 2, wherein
said charging data (CDR) is regularly generated when the counter means reaches a predetermined count value.

6. A method according to claim 1, further comprising a step of

25 - delivering (S1, S4, S5) said message to said associated predetermined destination.

7. A method according to any of claims 2 to 5, further comprising a step of

30 - transmitting (S7) the generated charging data (CDR) to a billing entity (BILL_SYS) of said communication network, and

- establishing a bill on the basis of said charging data for said respective specific user group.

35

- 19 -

8. A method according to claim 1, wherein
said specific user group (a, B) is a telemetric user
group.

5 9. A method according to claim 1, wherein
said message is a short message SMS.

10. A method according to claim 1, wherein
said message is a USSD message.

10

11. An exchange entity (MSC, SMSC) of a communication
network adapted to forward messages transmitted from a
respective user terminal (A1, A2, A3) of at least one
specific user group (A, B) to a respective predetermined
15 destination (D_A, D_B, D_C) associated to a respective one
of said at least one specific user group (A, B),
said exchange entity comprising:
a respective counter means (C_A, C_B, C_C) associated
to each of said predetermined destinations (D_A, D_B, D_C),
20 detecting means adapted to detect the arrival of a
message at said exchange entity (MSC, SMSC),
verifying means adapted to verify that the origin of
said message is a user terminal (MS) belonging to one of
said at least one specific user groups,
25 identifying means adapted to identify said at least
one specific user group and said associated predetermined
destination, and
control means adapted to increment said counter means
allocated to said predetermined destination associated to
30 said identified specific user group in response to signals
applied thereto from said detecting, verifying and
identifying means.

12. An exchange entity according to claim 11, further
35 comprising

- 20 -

- generation means adapted to generate charging data (CDR) based on a count value of said counter means.

13. An exchange entity according to claim 12, wherein
5 said control means is adapted to reset said respective counter means after generation of charging data.

14. An exchange entity according to claim 12, wherein
 said control means is adapted to regularly generate
10 said charging data (CDR) after a predetermined period of time.

15. An exchange entity according to claim 12, wherein
 said control means is adapted to regularly generate
15 said charging data (CDR) when the counter means reaches a predetermined count value.

16. An exchange entity according to claim 11, further comprising
20 an output means adapted to deliver said message to said associated predetermined destination.

17. An exchange entity according to any of claims 12 to 15, further comprising
25 a transmitter adapted to transmit the generated charging data (CDR) to a billing entity (BILL_SYS) of said communication network adapted to establish a bill on the basis of said charging data for said respective specific user group.

30

1/2

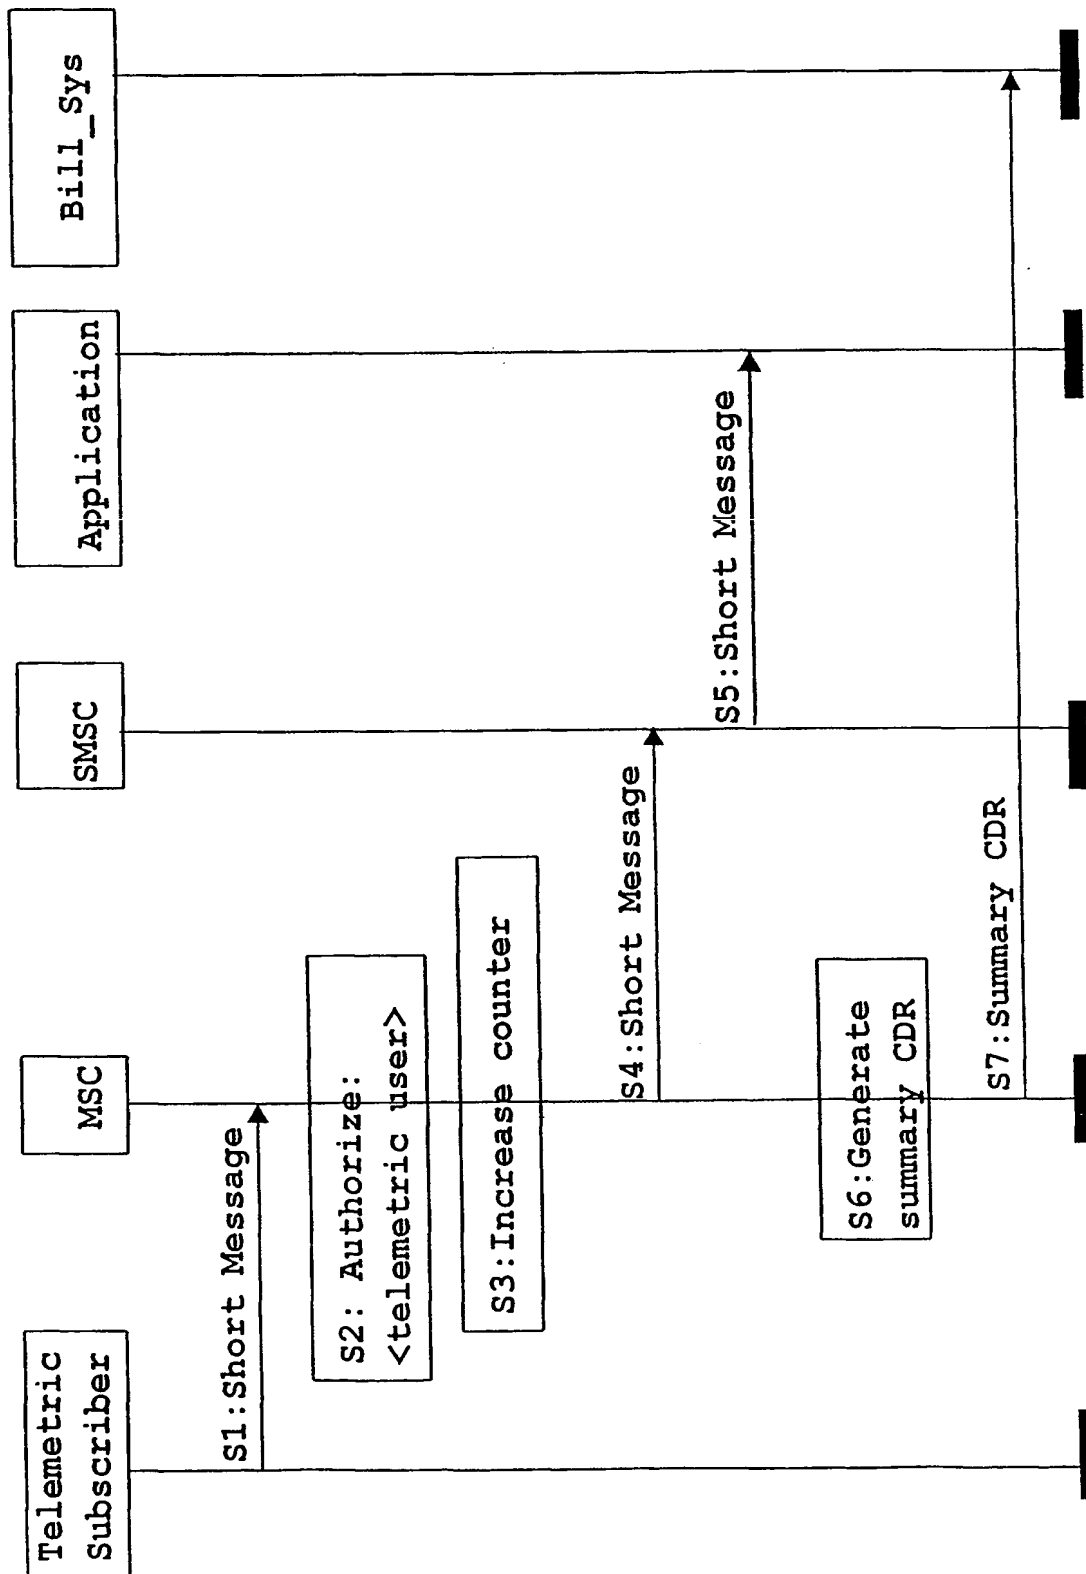


FIG. 1

2/2

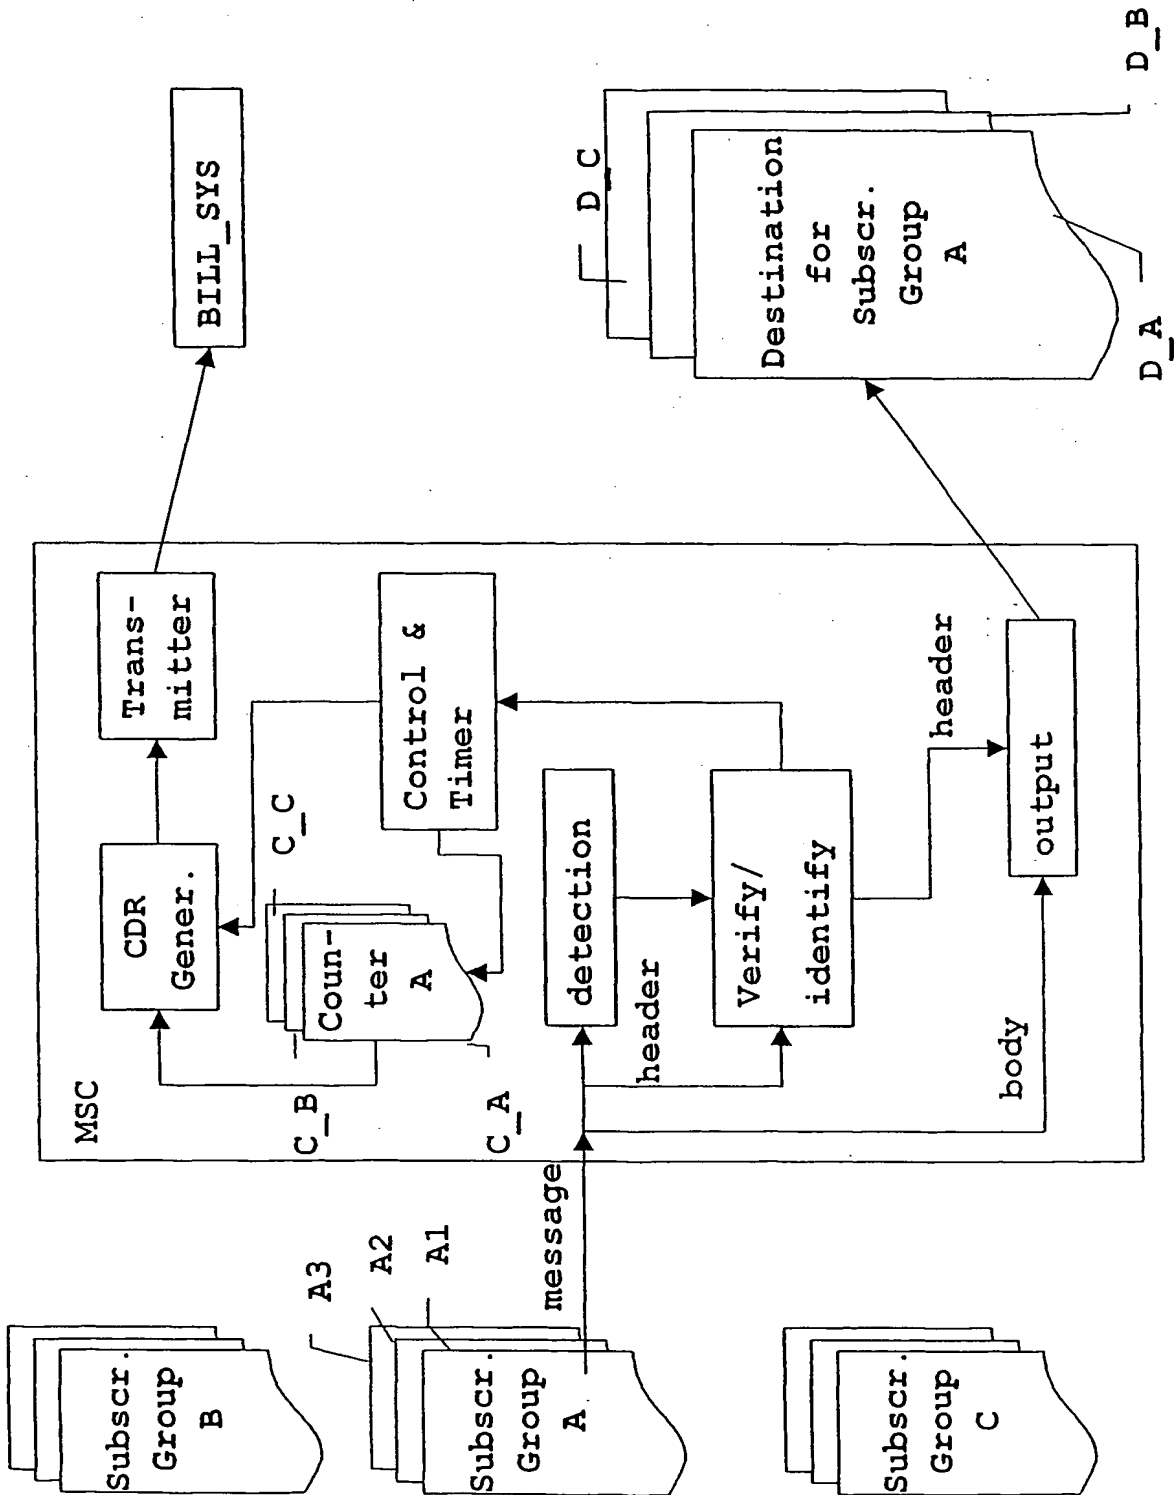


FIG. 2

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 00/11887

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04M15/00 H04Q7/38 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04M H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 56202 A (NOKIA TELECOMMUNICATIONS) 10 December 1998 (1998-12-10) abstract; claims; figures	1,6,9,16
A	US 5 905 736 A (Y. RONEN) 18 May 1999 (1999-05-18) abstract; claims; figures	1-7, 11-17
A	EP 0 920 178 A (IBM) 2 June 1999 (1999-06-02) the whole document	1-7, 11-17
A	US 6 150 955 A (M.J. TRACY) 21 November 2000 (2000-11-21)	
A	WO 99 49680 A (BELLSOUTH INTELLECTUAL PROPERTY) 30 September 1999 (1999-09-30)	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- * & * document member of the same patent family

Date of the actual completion of the international search

5 September 2001

Date of mailing of the international search report

13/09/2001

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

David, J

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 00/11887

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9856202	A	10-12-1998	FI	972356 A	04-12-1998
			AU	7656998 A	21-12-1998
			CN	1263674 T	16-08-2000
			EP	1025721 A	09-08-2000
			TW	411677 B	11-11-2000
US 5905736	A	18-05-1999	AU	2200397 A	12-11-1997
			WO	9740615 A	30-10-1997
EP 0920178	A	02-06-1999	US	6023499 A	08-02-2000
			JP	11225226 A	17-08-1999
US 6150955	A	21-11-2000	AU	5089198 A	22-05-1998
			EP	0958694 A	24-11-1999
			WO	9819447 A	07-05-1998
			US	6014089 A	11-01-2000
WO 9949680	A	30-09-1999	AU	3201599 A	18-10-1999
			EP	1064803 A	03-01-2001

THIS PART IS (REMOVED)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☒ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

